

LED PANEL LIGHT



LUXNA Ultra Slim LED Panel Light adopts super bright LED as a light source, which are stable, long life and have no UV & IR emission. The white aluminum frame is stylish and fashionable with everlasting colour. LUXNA Ultra Slim LED Panel Lights are the ideal replacement for traditional fluorescent recessed modular lights and can save up to 60% in energy costs.

Features


- Luminaire efficacy up to 100 lm/watt
- Suitable for 25mm and 15mm T-bar installations
- CRI >80, ErP compatible
- Ultra slim design 10.5mm thickness
- Supplied with 'plug and play' driver, non-dimmable
- 5 year warranty
- Quick and easy installation, no maintenance
- Ideal for: Offices, restaurants, hotels, shops, schools, hospitals, hallways, lobbies and meeting rooms

Specifications

- Dimensions, Power & Lumen output: See table
- Colour temperature: Warm White: 3000K, Natural white: 4000K, Daylight: 6000K
- Colour Rendering Index: >80
- Rated Life (L70): 50,000 Hours
- Frame: Aluminium
- Optics: Opal
- Beam spread: 120°
- Operating temperature: 25 - 40°C
- Input Voltage: 220 - 240V/AC
- Frequency: 50/60Hz
- Power Factor: >0.90
- Glow Wire: 650°C
- Installation: Recessed / Suspension / Surface mounted box

Options

- Dimmable compatible with 1-10V/Dali driver
- Lighting sensors and Motion sensors are optional
- Remote Emergency pack, 3 hour maintained

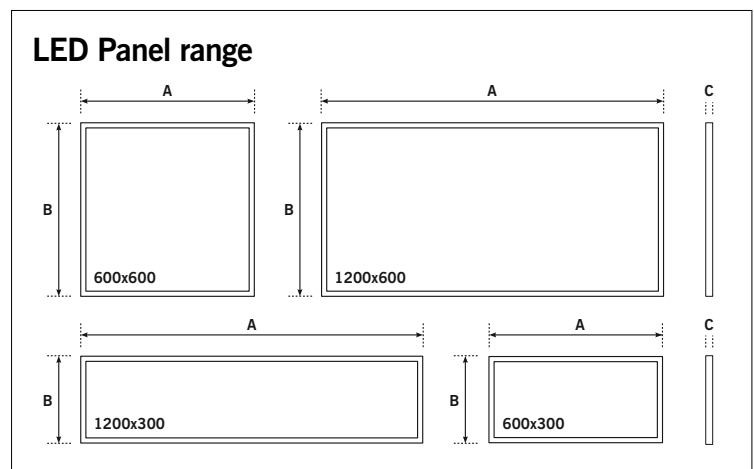

Technical Specifications

Part No.	Description	Power (W)	Measurement (AxBxC mm)	Lumen Output	IP Rating	Power Factor	CRI	Colour Temperature
LXPAN28LED63NW2	LED Recessed Panel	28	595 X 295 X 10.5	2240	IP20	> 0.90	> 0.80	4000K
LXPAN28LED63CW2	LED Recessed Panel	28	595 X 295 X 10.5	2240	IP20	> 0.90	> 0.80	6000K
LXPAN30LED66WW2	LED Recessed Panel	30	595 X 595 X 10.5	3000	IP20	> 0.90	> 0.80	3000K
LXPAN30LED66NW2	LED Recessed Panel	30	595 X 595 X 10.5	3000	IP20	> 0.90	> 0.80	4000K
LXPAN30LED66CW2	LED Recessed Panel	30	595 X 595 X 10.5	3000	IP20	> 0.90	> 0.80	6000K
LXPAN30LED66NW2/IP54	LED Recessed Panel/IP54	30	595 X 595 X 13.5	3000	IP54	> 0.90	> 0.80	4000K
LXPAN33LED66NW2/UGR19	LED Recessed Panel/UGR < 19	33	595 X 595 X 10.5	3300	IP20	> 0.90	> 0.80	4000K
LXPAN36LED66WW2	LED Recessed Panel	36	595 X 595 X 10.5	3000	IP20	> 0.90	> 0.80	3000K
LXPAN36LED66NW2	LED Recessed Panel	36	595 X 595 X 10.5	3100	IP20	> 0.90	> 0.80	4000K
LXPAN36LED66CW2	LED Recessed Panel	36	595 X 595 X 10.5	3100	IP20	> 0.90	> 0.80	6000K
LXPAN60LED123NW2	LED Recessed Panel	60	1195 X 295 X 10.5	5100	IP20	> 0.90	> 0.80	4000K
LXPAN60LED123CW2	LED Recessed Panel	60	1195 X 295 X 10.5	5100	IP20	> 0.90	> 0.80	6000K
LXPAN60LED126NW2	LED Recessed Panel	60	1195 X 595 X 10.5	5100	IP20	> 0.90	> 0.80	4000K
LXPAN60LED126CW2	LED Recessed Panel	60	1195 X 595 X 10.5	5100	IP20	> 0.90	> 0.80	6000K